

400V

0.75kW-160kW


LeaderSamco - FD



V/F

LeaderSamco-

FD

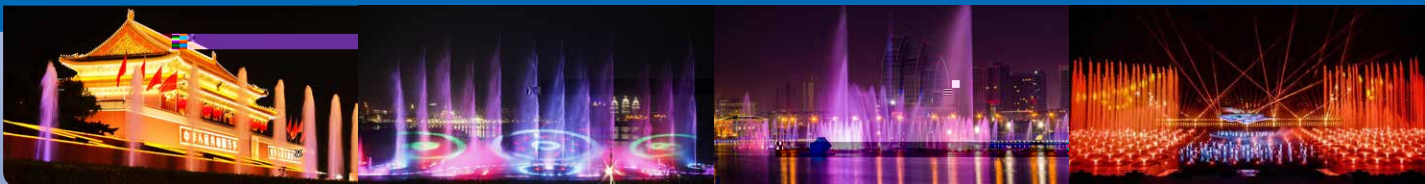


FD

4A009

-

009 9A


(400V)


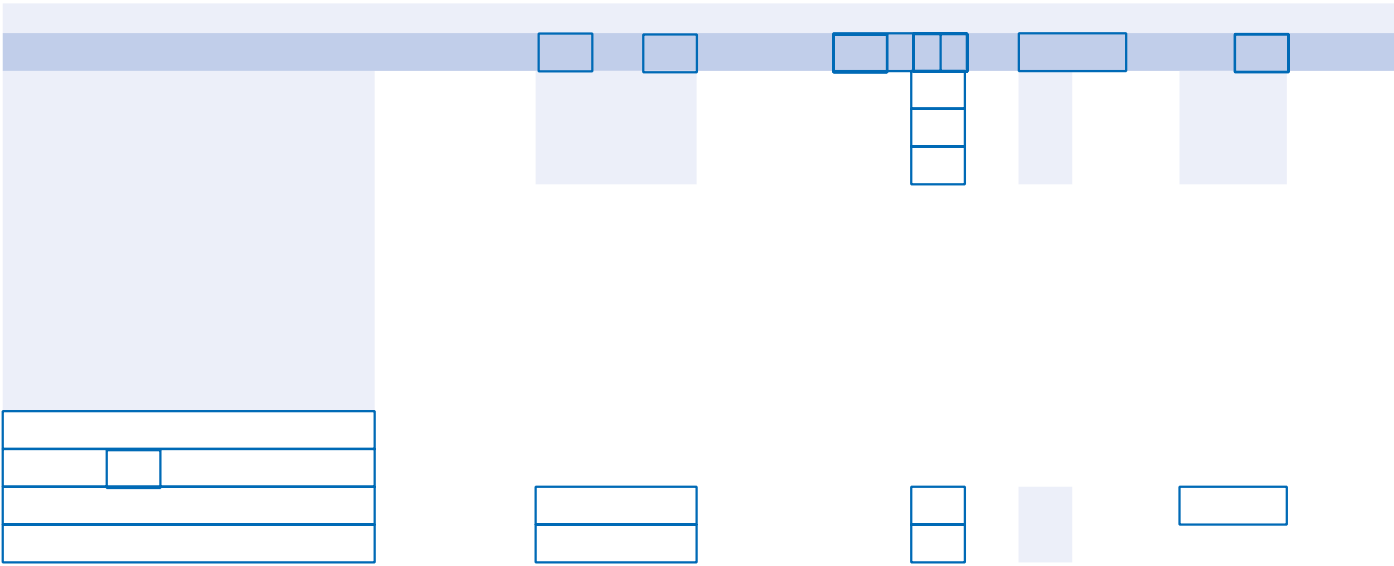


1 400V 400V
 2 AC400V
 3 10 1
 4

5
 6
 7 6

	RS485	
	SANKENLD	Modbus-RTU
	2	RS485
	500m	
	32	247
	[bps] 57600/38400/19200/9600/4800/2400/1200	
	ASC BINARY	BINARY
	8bit	
	1bit 2bit	
	CRC	
	ASC	CR+LF/CR
	BINARY	

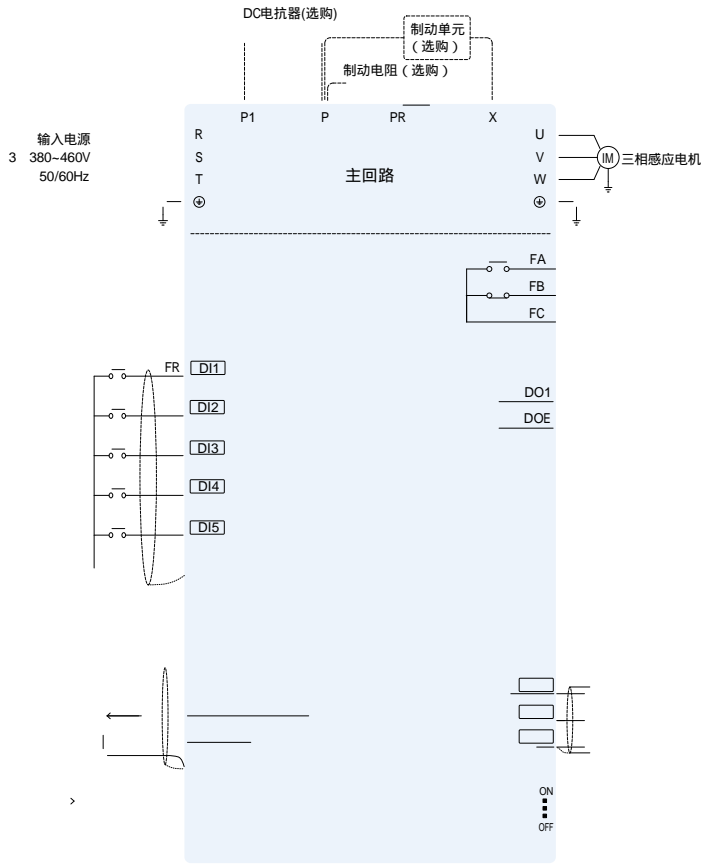

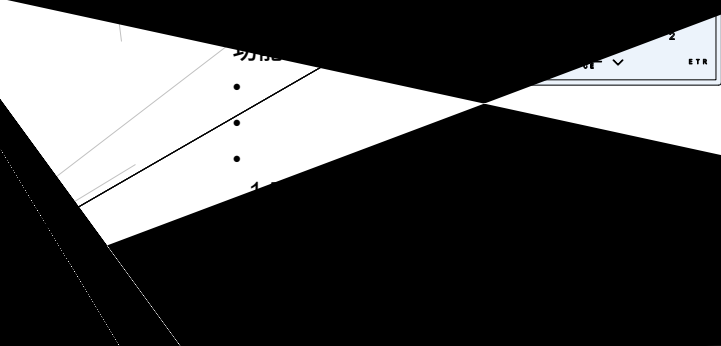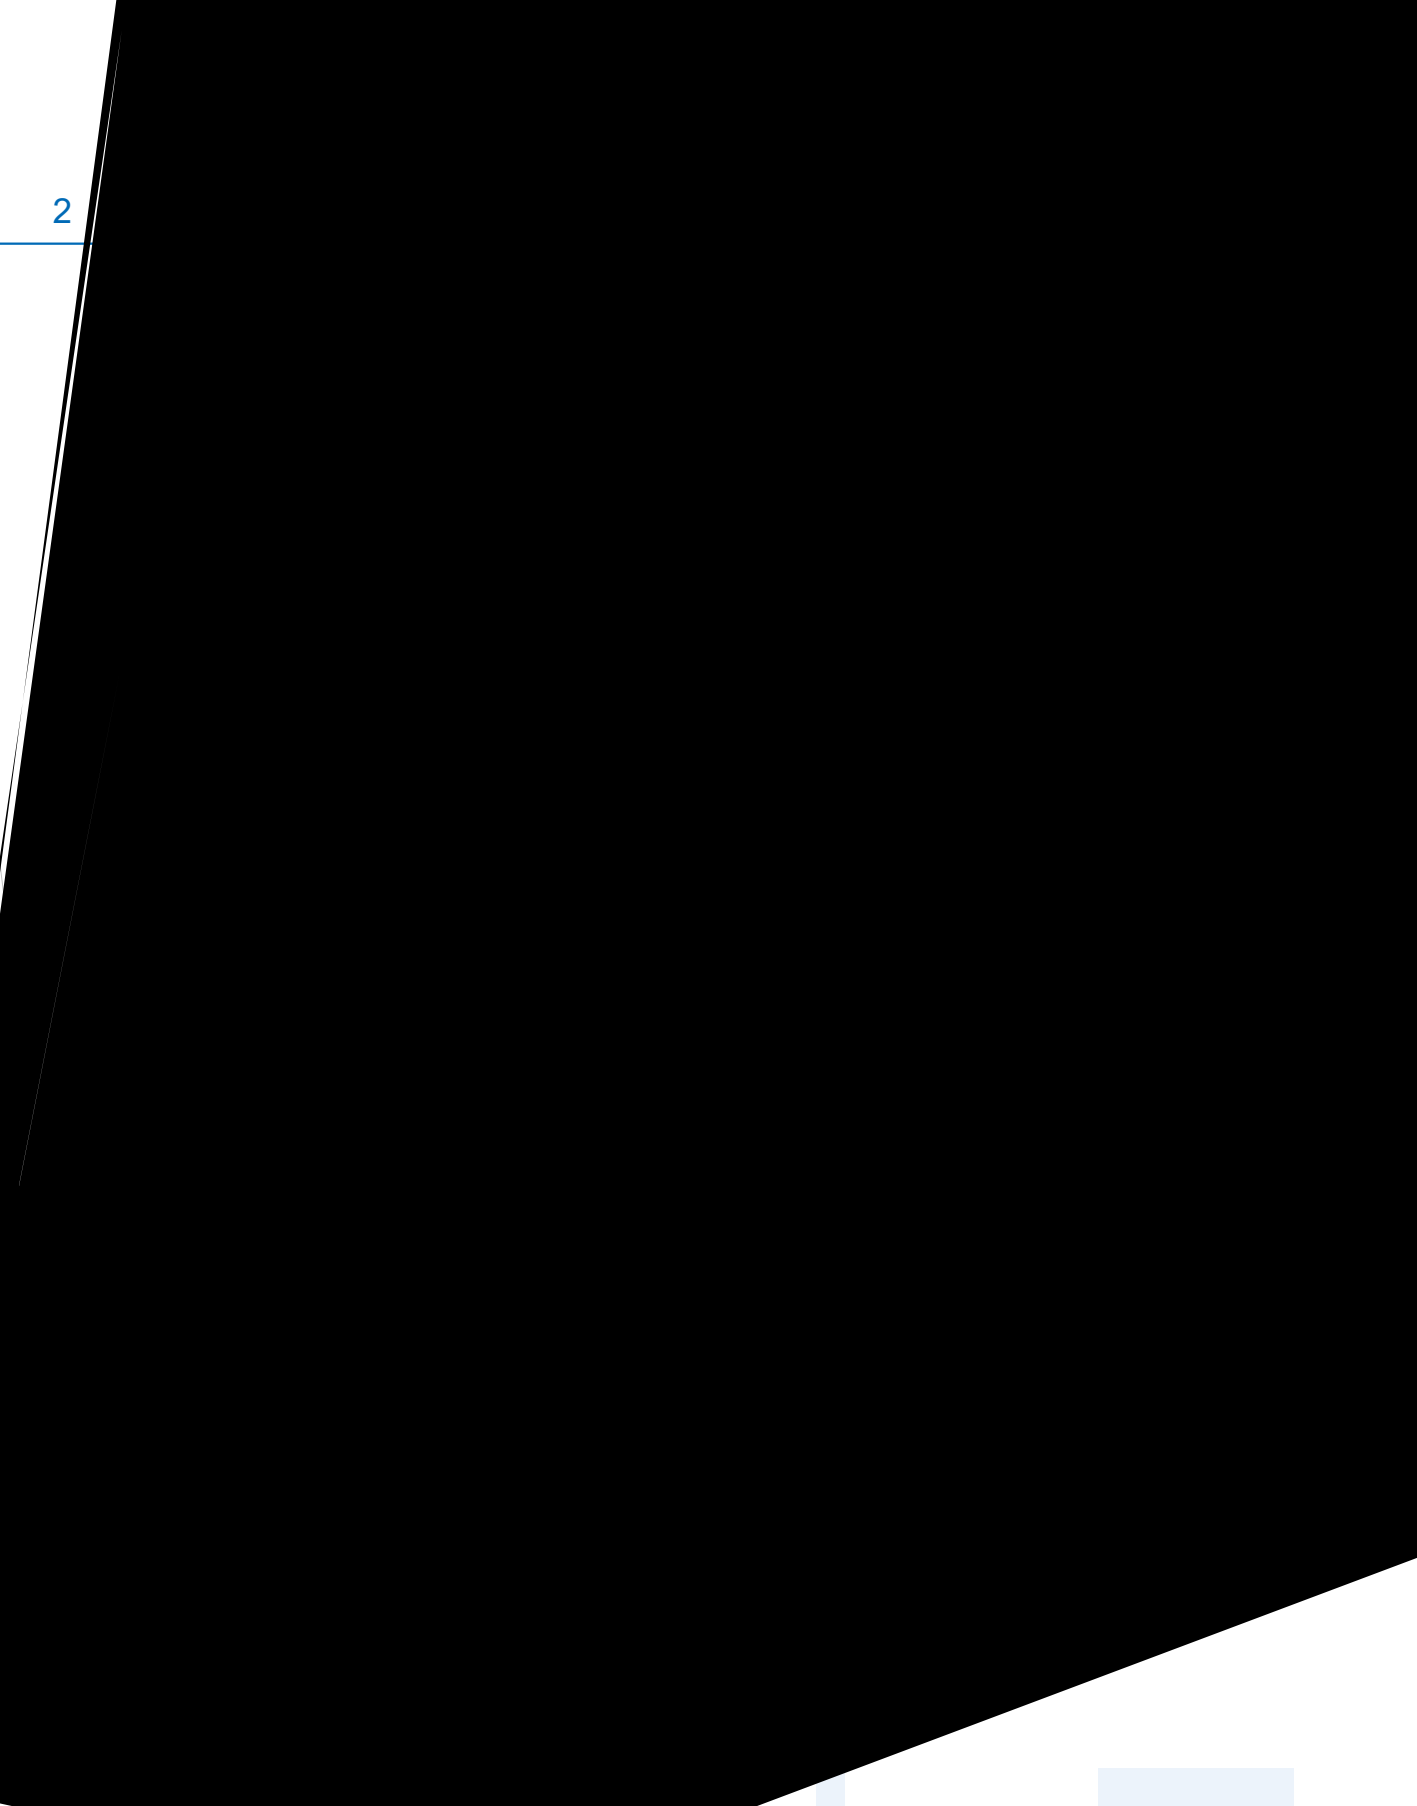

KL1-V24CA2-240500MD
2024.05